


DATA SHEET

BCV 400/500 FD


CLAW VACUUM PUMPS

dry and contact free compression
air-cooled

MAKE IT BECKER.

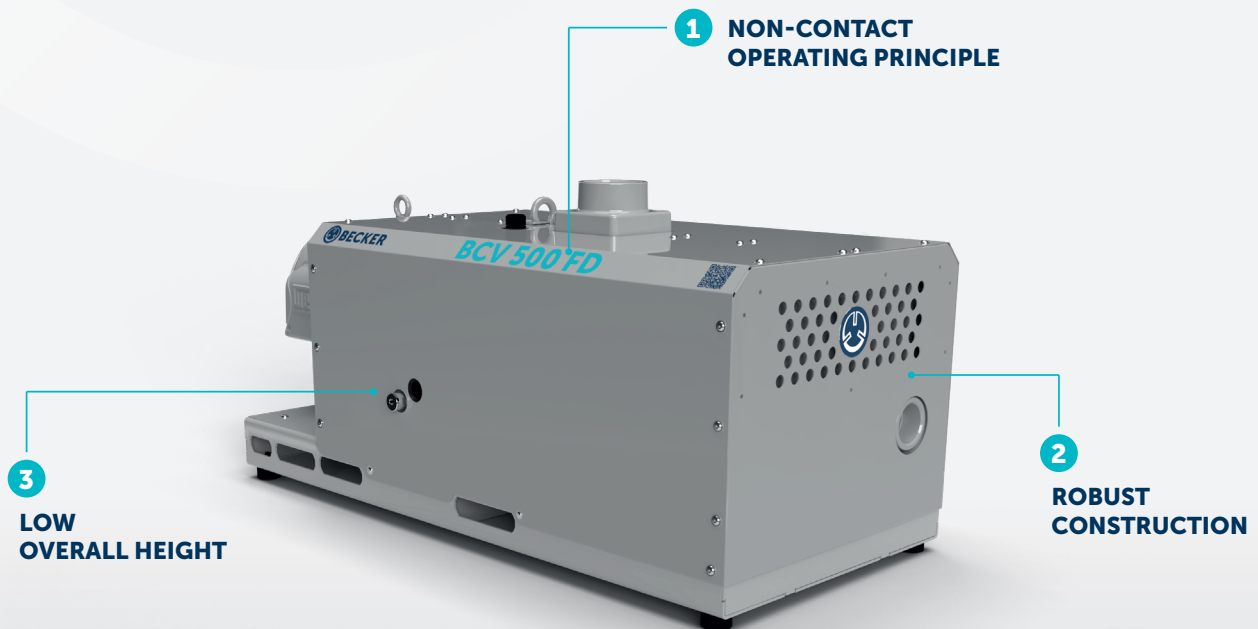

- 1** Minimal maintenance reduces operating costs and the need for serviceable parts while, maximising efficiency and productivity.
- 2** Thanks to high-quality construction, BCV vacuum pumps are both durable and reliable, suitable for demanding conditions.
- 3** A reduced space requirement ensures seamless integration into existing systems.

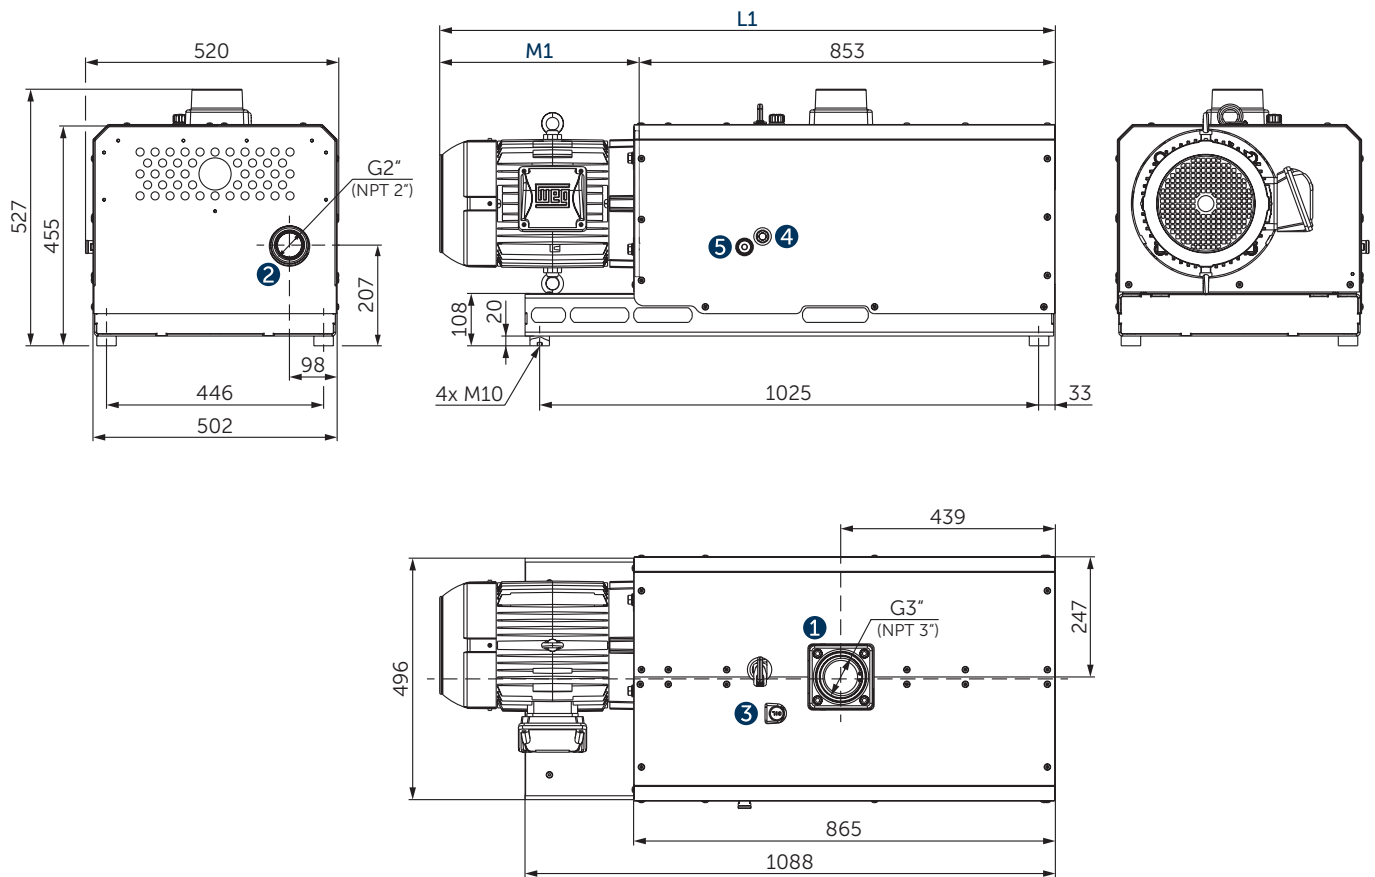


- 1 Vacuum connection (G3" or NPT 3")
 - 2 Exhaust air connection (G2" or NPT 2")
 - 3 Oil filler cap
 - 4 Oil sight glass
 - 5 Screw plug for oil drain
- L Overall device length L1 with motor. L1 and M1 are variable, see separate motor specification sheet.
- The motor illustration may vary.
 - Dimensions in mm

	Nominal capacity		Vacuum absolute		Installed motor power		Emission sound pressure level ¹⁾		Weight w/o motor
	m³/h		mbar		kW		dB(A) @ 400 mbar abs. ²⁾		kg
	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	50 Hz	60 Hz	
BCV 400 FD	400	470	200	200	7.5	9.2	73	75	258
BCV 500 FD	500	600	200	200	9.2	11.8	74	77	261

¹⁾ Emission sound pressure level, with the highest measured values, LpA (re 20 μ Pa): BCV 400 (500) FD = 89/90 (88/91) dB(A), 50/60 Hz
The values were determined according to the noise measurement DIN EN ISO 9614-2:1996-12, the basic standard DIN EN ISO 2151:2009-01 and DIN EN ISO 11203. Data according to DIN EN ISO 4871, measurement uncertainty KpA of 3 db.

²⁾ Suction and pressure side discharged

- Reference data (atmosphere): 1000 mbar, 20°C; Tolerance: +10%

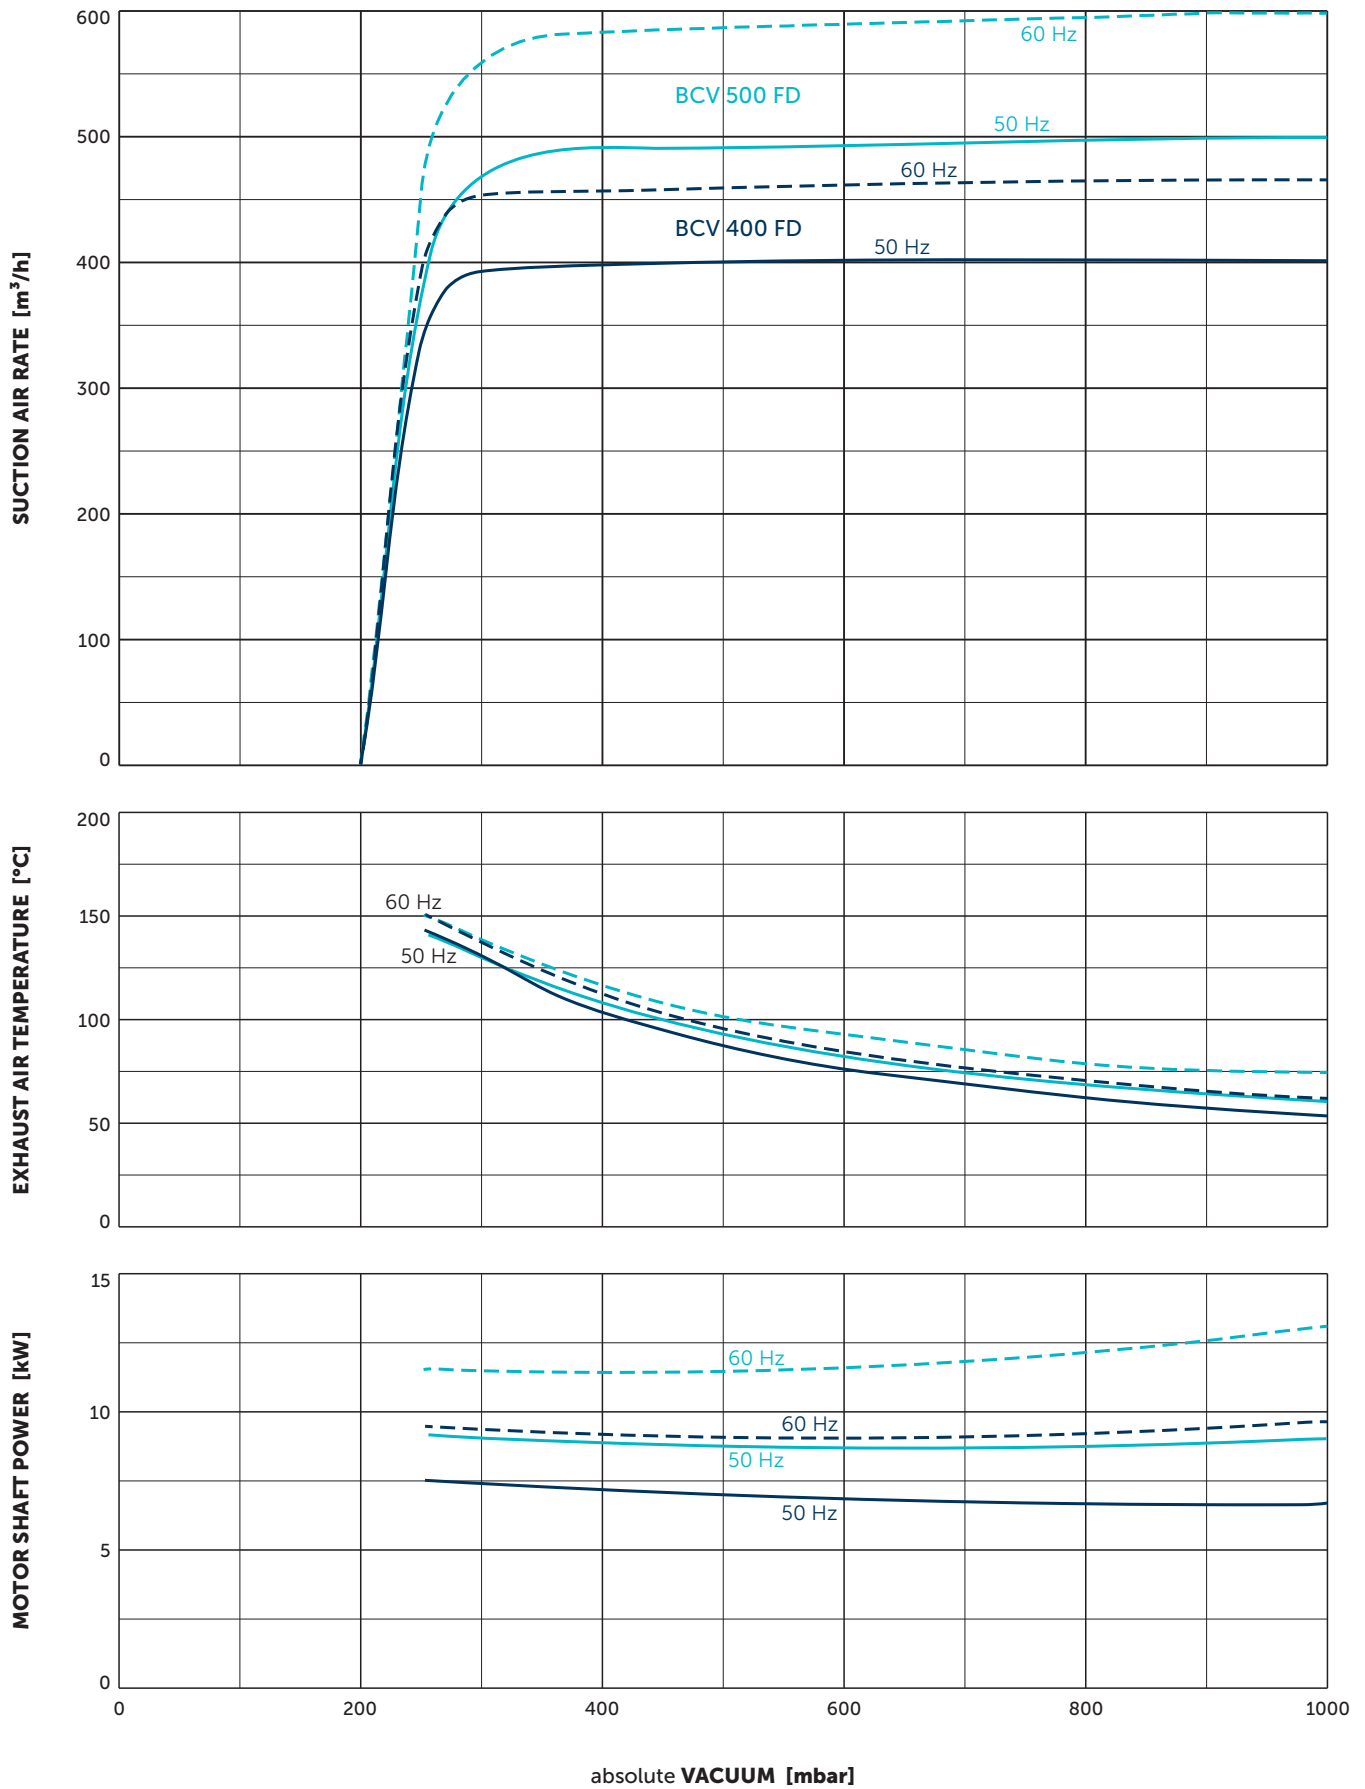

Suction air rate refers to the intake pressure
 Reference data (atmosphere): 1000 mbar, 20°C
 Tolerance: $\pm 10\%$

MAKE IT BECKER.

BCV
SERIES



MOTOR
SPECIFICATIONS



ONLINE
SHOP

